


INDUSCO MODEL WS TYPE II PARTICULATE SCRUBBERS

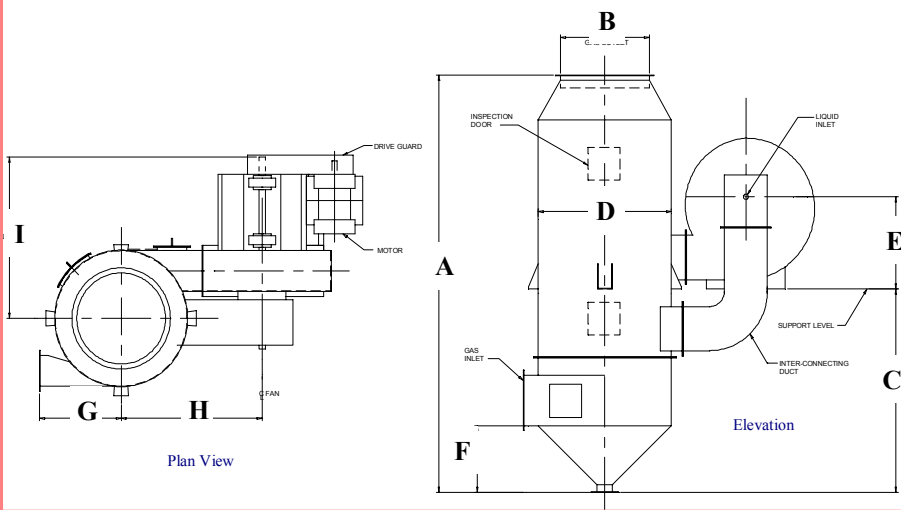

DIA./SIZE (D)	A	B	C	E	F	G	H	I	WEIGHT LBS.*	FAN SIZE	CAPACITY ACFM SATURATED
12	5'-3"	10"	3'-0"	11-1/2"	6"	12"	18"	2'-7 3/4"	570	10	400
15	5'-11"	12"	3'-3"	11-1/2"	7-1/2"	14"	20"	2'-7 3/4"	625	10	600
18	6'-6"	14-3/8"	3'-2"	16-1/2"	9"	15"	23"	3'-0 3/4"	685	14	900
21	7'-1 1/2"	16-1/2"	3'-5 1/2"	16-1/2"	10-1/2"	18"	2'-1"	3'-2 1/4"	745	14	1200
24	7'-7"	19-1/4"	3'-10"	17"	12"	20"	2'-4"	3'-5 1/4"	860	17	1600
30	8'-8 1/2"	2'-0"	4'-5 1/2"	17"	15"	2'-0"	2'-7"	3'-8 1/4"	1100	17	2500
36	10'-7 1/2"	2'-4 3/4"	5'-5 1/2"	2'-1"	18"	2'-2"	3'-5"	4'-3 3/4"	1830	26	3600
42	11'-9 1/2"	2'-10"	6'-2 1/2"	2'-1"	21"	2'-6"	3'-8"	4'-6 3/4"	2070	26	5000
48	13'-1 1/2"	3'-2 1/2"	6'-11 1/2"	2'-9"	2'-0"	2'-9"	4'-1"	5'-0 3/4"	2730	33	6400
54	14'-6"	3'-7"	7'-6"	2'-9"	2'-3"	3'-0"	4'-4"	5'-3 3/4"	3040	33	8000
60	16'-2"	4'-0"	8'-5"	3'-4"	2'-6"	3'-4"	5'-0"	6'-3 1/2"	4005	40	10000
66	17'-7"	4'-4 1/2"	9'-2"	3'-4"	2'-9"	3'-6"	5'-3"	6'-6 1/2"	4385	40	12000
72	19'-1"	4'-9 3/4"	10'-0"	4'-0"	3'-0"	3'-9"	5'-11"	7'-3"	7220	50	14500
78	20'-0"	5'-2 1/2"	10'-8"	4'-0"	3'-3"	4'-0"	6'-2"	7'-6"	7560	50	17000
84	21'-7"	5'-7"	11'-1"	4'-6"	3'-6"	4'-4"	6'-9"	8'-0 3/4"	9155	58	19500
90	23'-1"	6'-0"	12'-2"	4'-6"	3'-9"	4'-6"	7'-0"	8'-3 3/4"	10050	58	22000
96	24'-4"	6'-4 1/2"	12'-9"	5'-0"	4'-0"	5'-0"	7'-11"	8'-11 1/4"	12100	58	25500
102	25'-8"	6'-9 1/2"	13'-9"	5'-0"	4'-3"	5'-6"	8'-2"	9'-2"	12975	71	29000
108	27'-3"	7'-1 3/4"	14'-5"	5'-8"	4'-6"	5'-8"	8'-8"	9'-9"	15145	71	32000
114	28'-3"	7'-7"	15'-1"	5'-8"	4'-9"	5'-10"	8'-11"	10'-0"	16155	71	36000
120	30'-0"	7'-11 3/4"	16'-7"	5'-8"	5'-0"	6'-2"	9'-2"	10'-3"	17690	71	40000
126	31'-1"	8'-4 1/2"	17'-0"	6'-3"	5'-3"	6'-6"	9'-10"	11'-0"	20610	78	44000
132	32'-2"	8'-9"	17'-10"	6'-3"	5'-6"	6'-10"	10'-1"	11'-3"	21530	78	48000
138	33'-11"	9'-2 1/4"	18'-6"	6'-10"	5'-9"	7'-0"	10'-9"	11'-10"	23995	78	53000
144	34'-10"	9'-7 1/4"	19'-1"	6'-10"	6'-0"	7'-4"	11'-0"	12'-1"	25030	78	58000

* Approximate weight of scrubber with fan and heavy duty carbon steel construction. Does not include weight of support structure or motor and drive.